


TERRACOTTA

QUARRY TILES

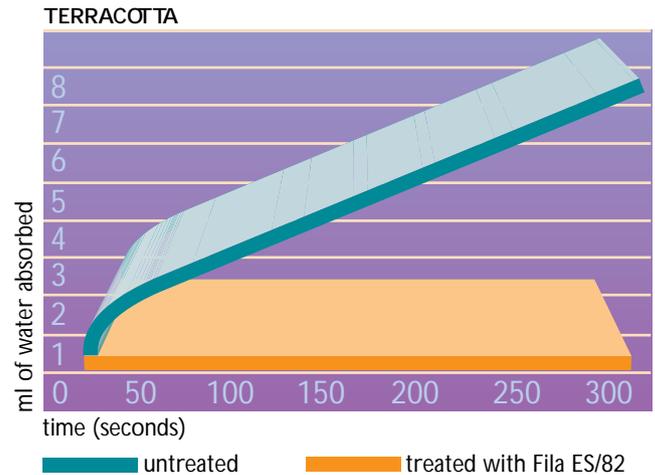

The diagram illustrates the difference in water absorption levels between terracotta treated with Fila products and untreated terracotta.

### WHAT IT'S FOR

- Prevents water absorption
- Creates a barrier against efflorescence
- Fila ES/82 helps ensure uniform absorption of the products used in the subsequent treatment steps
- Ideal for protecting exterior brick walls

### ADVANTAGES

- Does not alter the natural colour of the surface
- Excellent for interior and exterior surfaces
- Prevents moss formation
- Does not alter terracotta frost resistance: tested by the Bologna Ceramic Centre
- Allows the surface to breathe
- High penetration capacity

### HOW IT'S USED

*Do not dilute: Ready to use*

#### Application:

1. clean the floor with **Deterdek** or **Fila Ph Zero** and rinse thoroughly.
2. once the surface has dried (after 7/15 days for terracotta) apply the product with a flat brush, evenly and generously, soaking the tile joints thoroughly as well.
3. wait 24 hours then finish, if desired, with either a second coat of the product or with **FilaFob** for an oil-repellent treatment, or apply a wax that is suitable for interior floors

*Fila ES/82 can also be applied by the airless method*

#### Maintenance:

*diluted solution of FilaCleaner*

24 hours



#### COVERAGE

With one litre:

Terracotta Brick	10/20 m <sup>2</sup>
Quarry tile	20/30 m <sup>2</sup>

\*Coverage rates are approximate and refer to a single coat of the product\*

#### Packaging

1 litre cans in box of 12.  
5 litre cans in box of 4.

#### PRECAUTIONS

- when used indoors, ventilate the premises thoroughly.

#### COMPOSITION

Blend of siloxane compounds dispersed in de-aromatized hydrocarbon solvent.

#### LABELLING

##### Symbol

St Andrews Cross

##### Risk phrases

Flammable. Harmful: may cause lung damage if swallowed. Repeated exposure may cause skin dryness or cracking.

##### Safety phrases

Keep out of the reach of children.

Keep away from food, drink and animal feeding-stuffs. In case of fire use: earth, sand, chemical powder or foam. If swallowed, do not induce vomiting: seek medical advice immediately and show this container or label

Contains: de-aromatized mineral turpentine.



#### TECHNICAL INFORMATION

Appearance: liquid

Colour: colourless

Odour: slight hydrocarbon solvent odour

Density: 0.790 kg/litre

Flash point: 40° C

*The information above reflects our latest technical know-how and is the outcome of ongoing laboratory research and testing. However, some factors are beyond our control. It is essential to integrate our suggestions with your own on-site preliminary tests and check.*

*Fila accepts no liability for improper use of its products.*